

Slim Line Label Feeder LFS

only 30 mm wide



The space-saving labelling solution: only 30 mm wide

The automatic marking per label feeder is a cost-efficient and simple solution which is used in several cases.

With a width of around 60 mm conventional label feeders are using several feeder positions in the pick and place system – although the labels are in most cases very small – very often much less than 10 x 10 mm.

The Slim Line Label Feeder from EFS is the perfect solution for small labels – with the revolutionary width of 30 mm it needs **one feeder position only** in the pick and place system.

Thus it saves ready cash in the production line because space is expensive.

Further advantages:


- Compatible with many popular pick and place systems and special machines
- Feeds the label very simple like a component
- The flexible solution for marking your boards
- Precise and automatic placement of labels
- Reliable electronic operation
- Low maintenance costs
- Saves time and money

The Slim Line Label Feeder can be used for all label sizes from 4x4 mm, maximum label length is 25 mm, maximum liner width 15 mm.

For bigger labels still the standard label feeder with more width is available.

The empty liner material is collected in an integrated box and can be easily disposed during the placement without production stop.

Optionally the feeder can be equipped with a reel holder for the label reel.

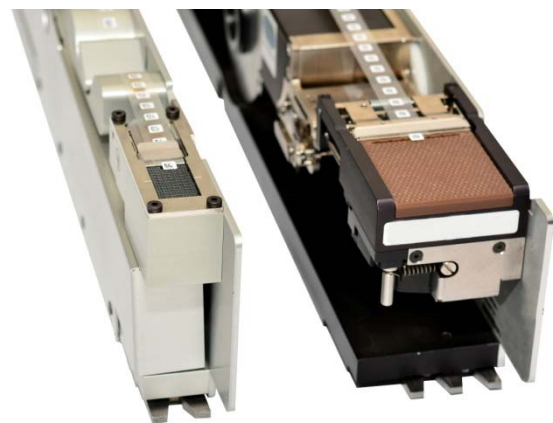

Slimline
Label Feeder
30 mm wide

Standard
Label Feeder
ca. 60 mm

The complete solution for an automatic label application:



Our label feeders combined with IDENTCO's new LEAD FREE Polyimide labels to provide a simple, steady, precise and cost effective automatic tracking system! We solve your space problem with label sizes from 4x4 mm!

TT403FL is a Polyimide (Kapton) material that is temperature resistant up to 300° C. The material is available in white, tan, matt or glossy. They can be pre-printed with different colours (Thermal Transfer). The transparent liner is especially designed for auto-applications, as i.e. with Label feeders. TT403 FL is certified according to UL & CSA and guarantees RoHS conformity.

To eliminate damaging static buildup in the production area, IDENTCO utilizes the **REEL-e™**, an anti-static plastic reel.

Standard label sizes available ex works or in short term – pre-printed or blank, i.e.:

Label size / mm	Liner width / mm
3,99 x 3,99	11,43
5,00 x 5,00	11,43
6,35 x 6,35	11,43
6,98 x 6,98	11,43
8,89 x 8,89	12,70
9,53 x 9,53	12,70

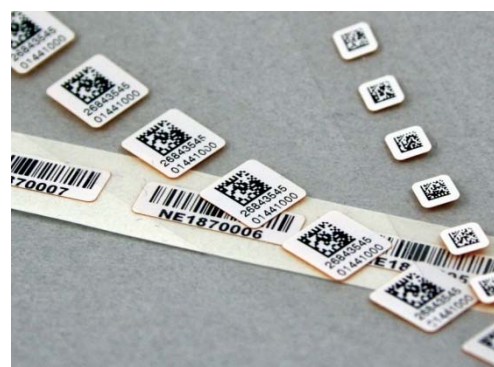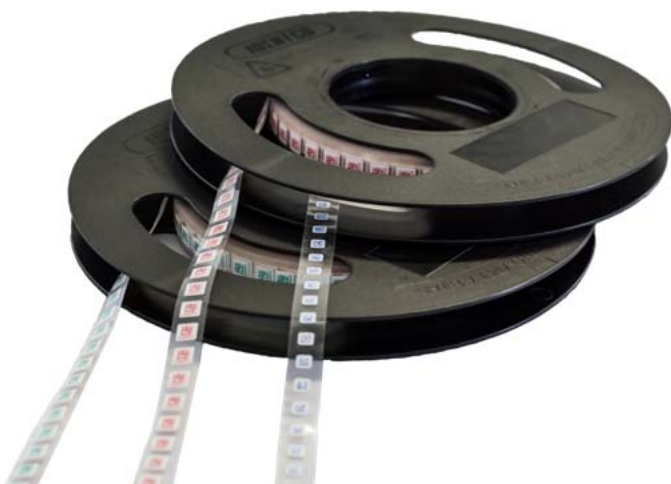

Do you already know our
further products?

Amongst others:

AOI and SPI systems from Mirtec

**Diverse feeding solutions like tube feeder, JEDEC tray feeder and
Tape feeder for special machines**

**Taping machines, systems for separation and application
of components and special parts**

**Dispensers, Die Attach Systems, systems for Heat Bonding
and LCD Module equipment**

**Solutions for identification like labels and label printers,
label feeders, also with integrated printer (POD)**

We are looking forward to your challenge!

pb tec solutions GmbH

Max-Planck-Straße 11

63755 Alzenau (Germany)

T.: +49 6023-94771-0

F.: +49 6023-94771-29

info@pbtecsolutions.de - www.pbtecsolutions.de